


Mercedes 722.3 722.4

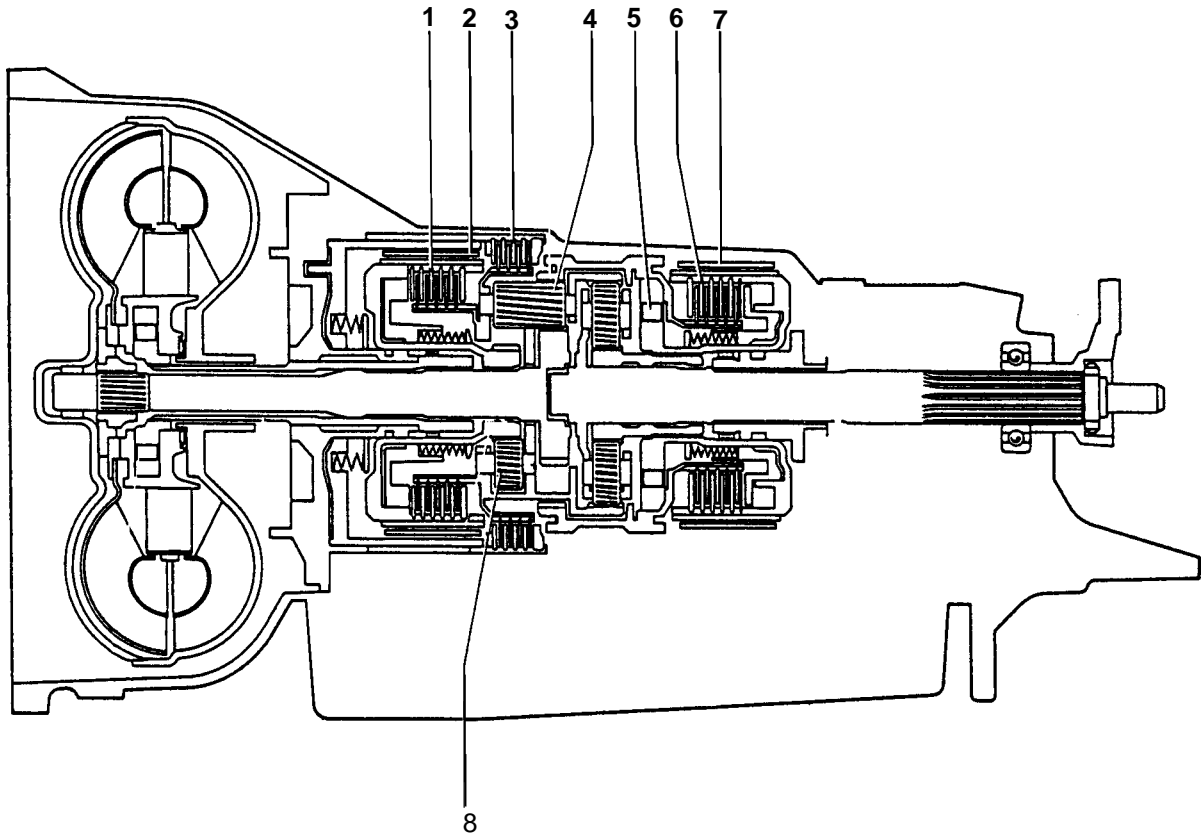


- 1 - Clutch K 1 3 - Disc Brake B 3 5 - One-Way Clutch F 7 - Brake Band B 2
- 2 - Brake Band B 1 4 - Wide Planet Pinion 6 - Clutch K 2 8 - Narrow Planet Pinion

	Int. Band	Fwd. Band	Rev. Clutch	Direct Clutch	4th Clutch	OWC	
Speed	B 1	B 2	B 3	K 1	K 2	F	Reduction
1		X			(X)	X	3.68
2	X	X					2.41
3		X		X			1.44
4				X	X		1
R			X		(X)	X	5.14

(X) K 2 bridges the one-way clutch during deceleration (coasting).

Reference Chart:

B1/Intermediate	B3/Reverse	K2/4th
B2/Forward	K1/Direct	F/Low One Way Clutch

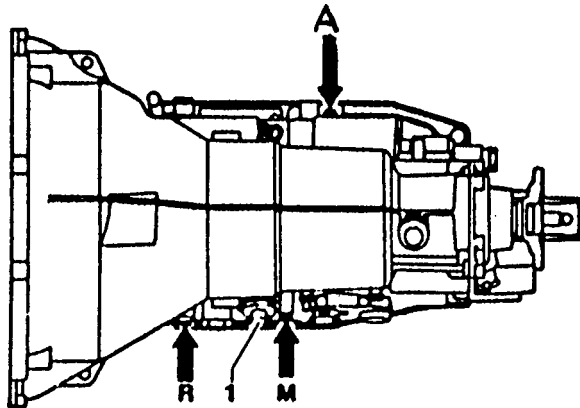


- A - Working Line pressure
- M - Modulating Pressure
- R - Governor Pressure
- 1 - Vacuum Control Unit

Modulator Pressure: Adjusted W/ a gauge no vacuum, in drive @ specified MPH use supplied chart for proper modulator usage & pressures.

Line Pressure 75-90 PSI in Drive @ Idle
 160-195 PSI @ Stall in Drive
 Governor Pressure: 1/2-2/3 of Road Speed
 Example @30MPH Governor Pressure
 Should be Approx. 15-20 PSI


Vacuum control unit version "B" has been installed up to February 1981. Starting February 1981 the vacuum control unit with the thrust pin for heat expansion compensation version "A" is installed.
Update to the late version on overhaul

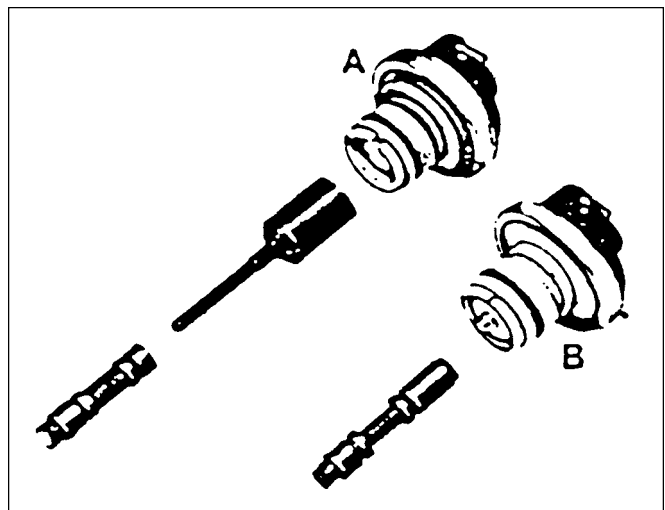

722.3 Models Version	Set @ 31 MPH Color	PSI
.301	Green	51
.303	Green	42
.304	Red	51
.309	Red	41
.310	Red	57
.311	White	48
.312	Red	54
.313	Red	58
.315	Green	42
.317	Black	46
.320	Black	57
.321	Black	46
.323	Red	58
.324	Green	52
.342	Black	58
.350	Black	55
.351	Black	58
.352	Red	55
.353	Black	59
.355	Black	55
.358	Black	58
.359	Red	55
.361	Red	55


722.4 Models Version	Set @ 31 MPH Color	PSI
.400	Green	46
.403	Green	44
.408	Green	57
.409	Red	48
.410	Green	51
.413	Red	47
.414	Brown	41
.416	Black	44
.418	Red*	47* To serial #813648
	Black*	47** From Serial #813649

Governor Assembly 722.4

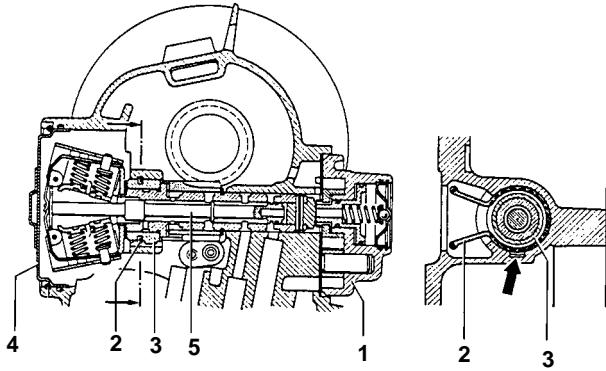

- 1. Secondary Pump
- 2. Lock Ring
- 3. Bearing Ring

Governor Assembly 722.3

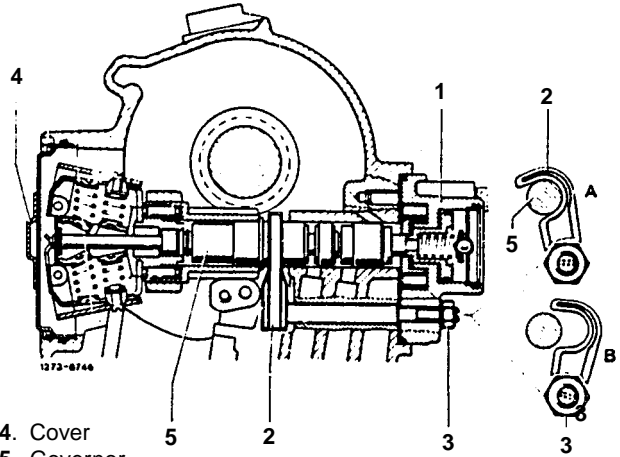

- 4. Cover
- 5. Governor

B3 Clutch Clearance

Measurement "A"

Position Gauge Bar on Case Surface.
 Measure Distance to Edge of B3 Plate Spring. (D)




Measurement "B"

Position Gauge Bar on B3 Piston. (E)
 Measure Distance to Installed Gasket


"A" - "B" = "C"

"C" = 1.5 - 2.0mm / .059" - .079"


Measurement "A" Detail

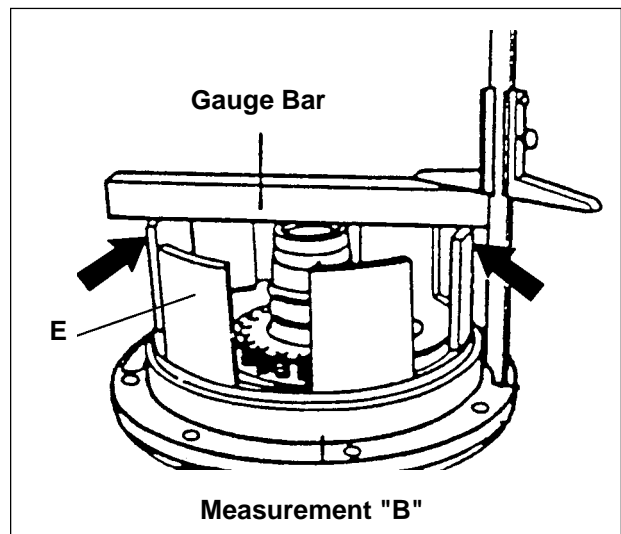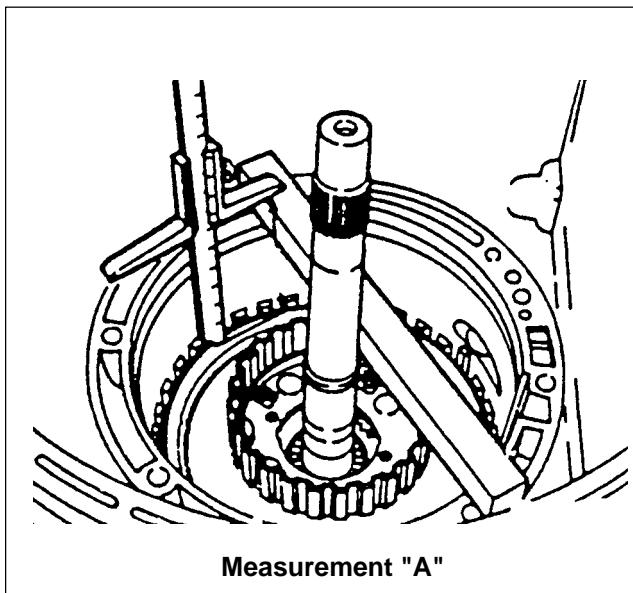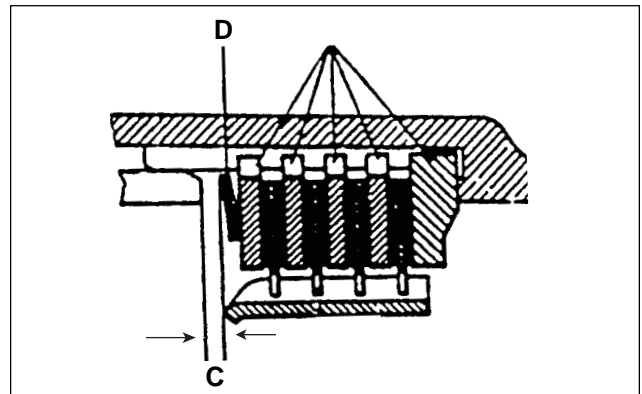

Measurement "F" Detail

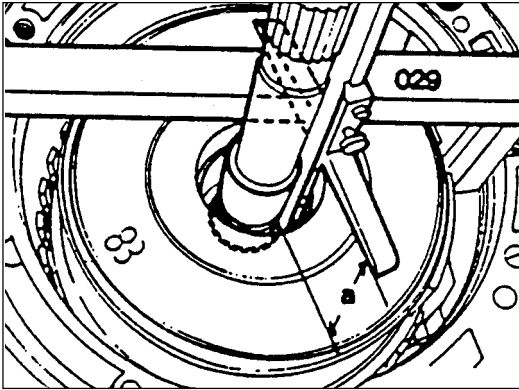

Measurement "H" Detail

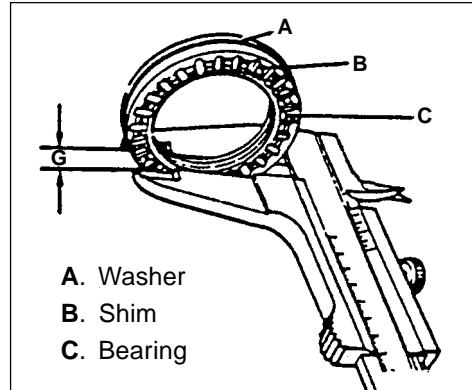



K1 to Pump Clearance

Measurement "B" (Previous Page)
Position Gauge Bar on B3 Piston.
Measure Distance to Installed Gasket.

Measurement "F"
Position Gauge Bar on Case Surface.
Measure Distance to K1 Thrust Surface

Measurement "G"
Add K1 Shim, Thrust Bearing & Washer
Thickness' Together


$"B" - "F" - "G" = "H"$
 $"H" = 0.4 - 0.6\text{mm} / .016" - .024"$
W/Rear Housing Installed



Version "A"

Thrust bearing B2 together with brake band guide without oil discharge hole (arrow).



Installed up to transmission serial No. 377 682



Version "B"

Thrust Bearing B2 with oil discharge hole down the way (arrow) only in combination with brake band guide with additional oil discharge hole (arrow).

Installed effective Transmission serial No. 377 683




Version "C"

Thrust bearing B2 with enlarged stroke, identified by elimination of annular groove (arrow) in combination with brake band piston B2 with reduced contact stroke. Consequently, size "a" is 2.6-2.8mm; was 3.4-3.6 mm.

Installed effective Transmission serial No. 451 986

Note: Install thrust bearing B2 with enlarged stroke only together with the modified brake band piston B2.

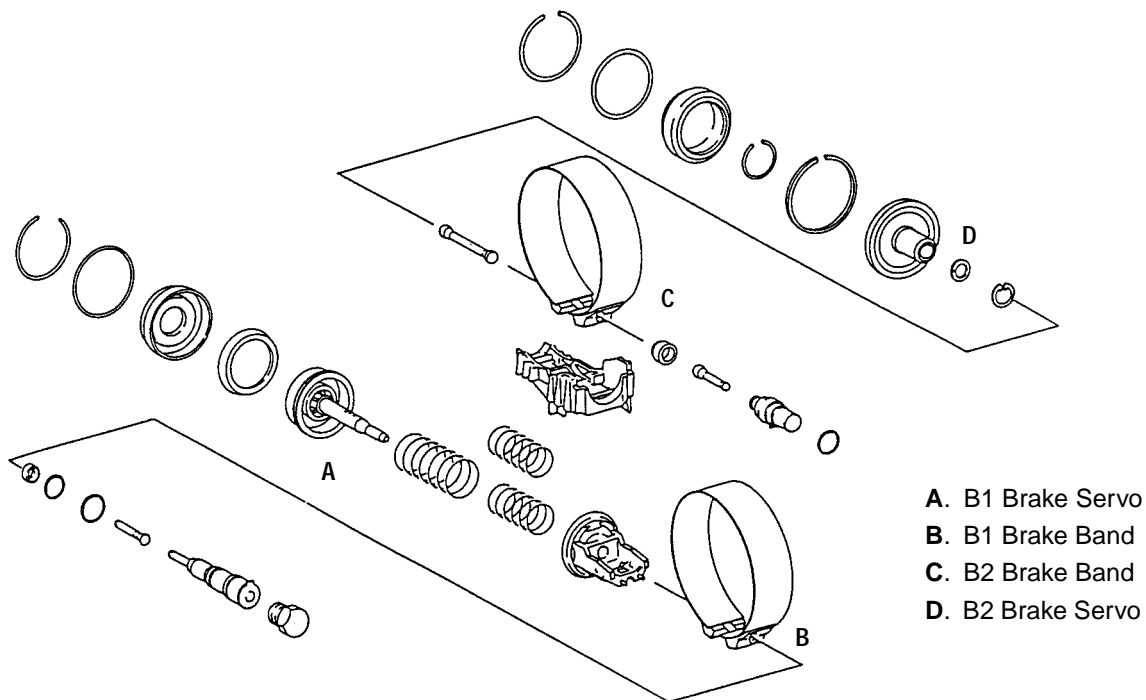

- A. B1 Brake Servo
- B. B1 Brake Band
- C. B2 Brake Band
- D. B2 Brake Servo

B2 Brake Band Adjustment.

Install Servo Cover & Ring

Press band toward band piston - direction of arrow so that piston contacts cover. (Fig. 1)

Measure dimension "A" on brake band

Press band toward thrust element - in direction of arrow until it bottoms (Fig. 2)

Measure dimension "B" on brake band

Measured A - B = C. C = Brake band travel
 5.5 - 6.0mm / .217" - .236"

Fig. 1




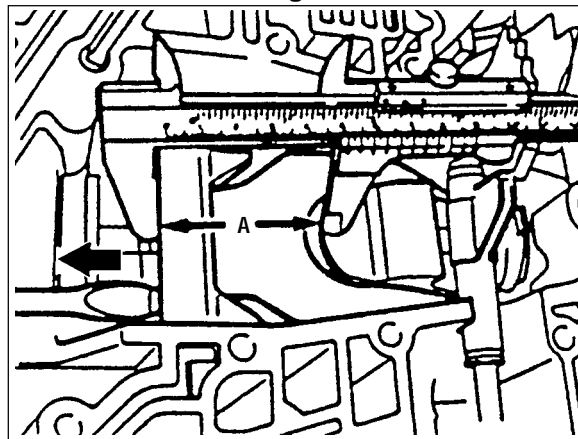



Fig. 2

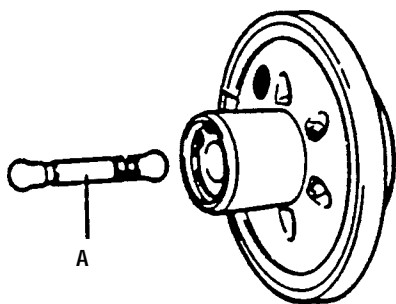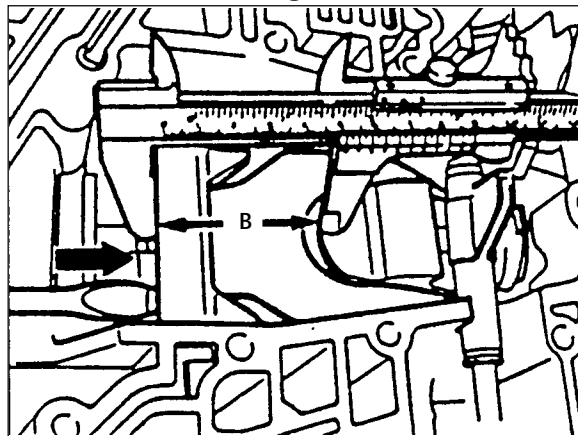


Note: Thrust pins (A) are available with lengths of 47.2; 48.8 and 49.6 mm for brake band B2 1.858", 1.921" & 1.953"

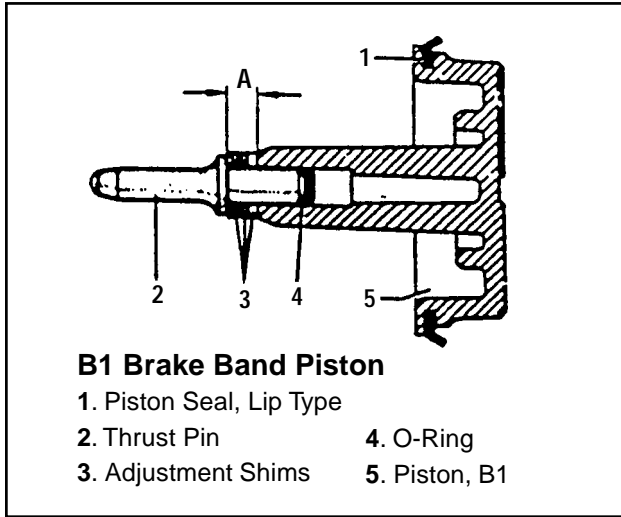

A: Servo Adjustment Shims Not to Exceed
 6.5mm / .256"

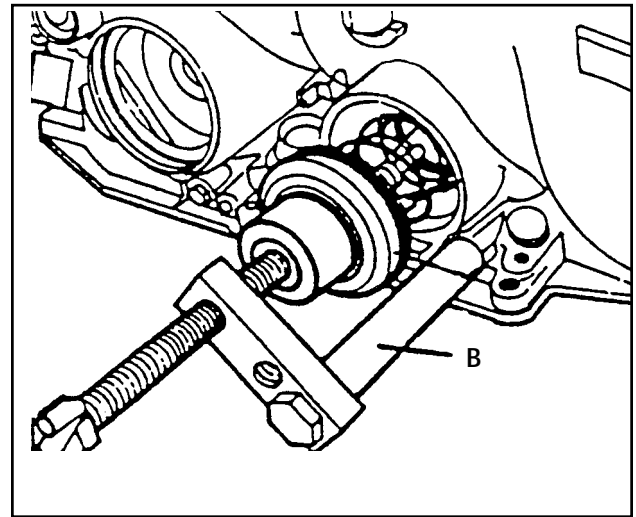

B: Servo Assembly/Disassembly Tool,
 Mercedes #125 589 06 21 00 or Equivalent


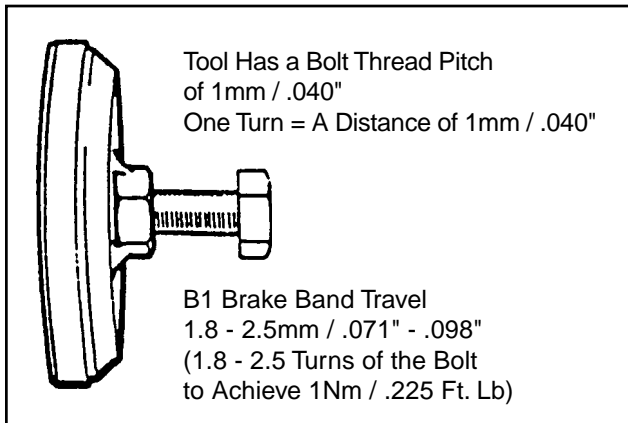



Delayed Engagement in all Forward Ranges
 May be Due to the "T" Type B2 Brake Piston Seal

The "T" Type Seal is not as Flexible and May Not
 Seal Well Against the Servo Bore.

By Grinding a 30 Degree Chamfer Around the
 Outer Land on the Piston - See Illustration

This Will Allow Additional Oil Pressure to Directly
 Affect the Piston Seal During the Apply

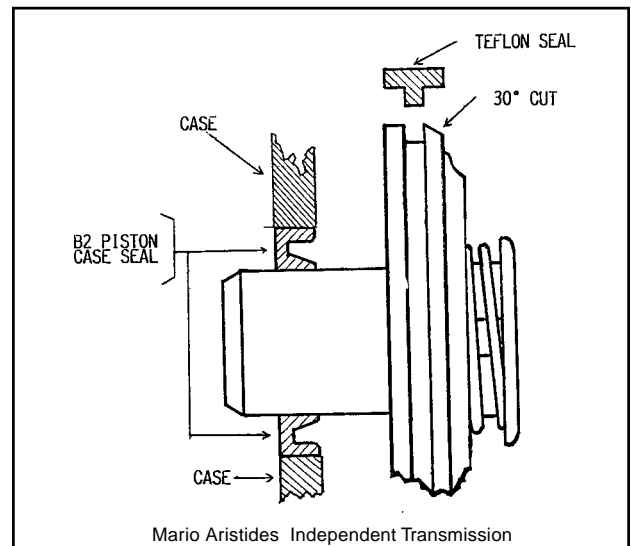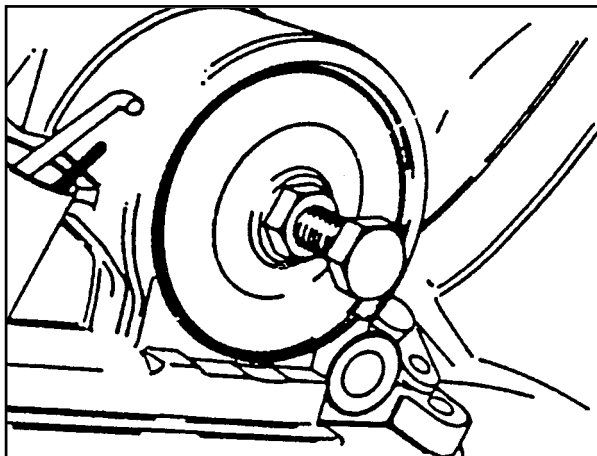

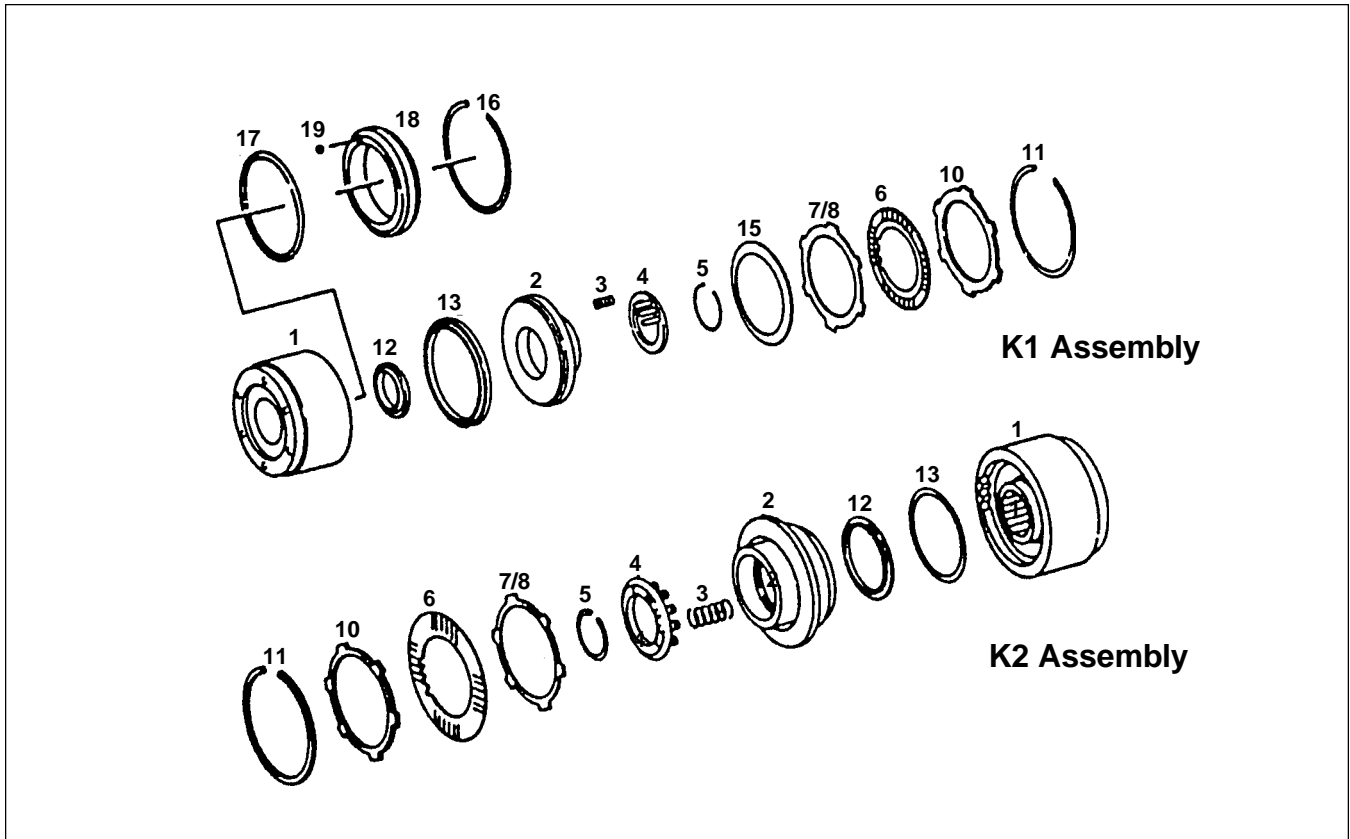

Replacing K1 & K2 Aluminum Support O-Ring In Mercedes 722.3 And 722.4


Read Complete Instructions Carefully And Completely Before Replacing O-Ring.

K1 Aluminum Support O-Ring Replacement


1. Remove three rivets from the drum holding the support to the drum.
2. Drill the holes in the aluminum to 3/16".
3. Counter sink the area on the inside of the support where the head of the bolt meets the support.
The head of the bolt needs to be recessed in the support so that the bolt doesn't interfere with the piston travel.
4. Tap the three holes in the drum with a 10-32 machine tap and clean all parts thoroughly.
5. Place the new O-Ring in the support groove using assembly lube to hold the O-Ring in place.
6. Install support into drum, install the three bolts being sure to pull down the support evenly, torque bolts to 36 inch pounds.
7. Turn the drum over and remove excess part of the bolt that is sticking out.

K2 Aluminum Support O-Ring Replacement


1. Do steps 1 and 2 from above.
2. The K2 drum support is a different design than the K1. You need to use a 1/4" counter sink drill bit so the support has the same counter as the bolts. The head of the bolts will not interfere with piston operation.
3. Grind off the edge of the bolt heads so that they clear the support and fit down in the pockets.
4. Do steps 4-7 from above.

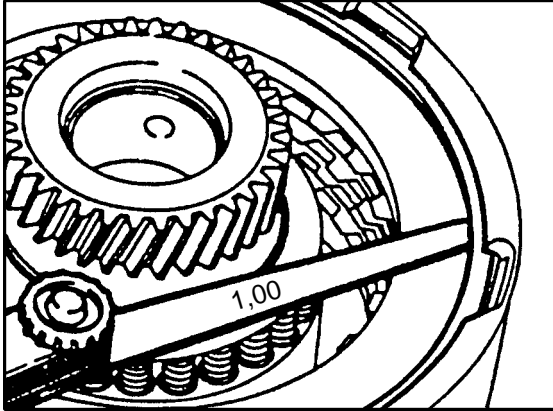


K1 & K2
Adjust the release clearance to 0.7-1.3mm

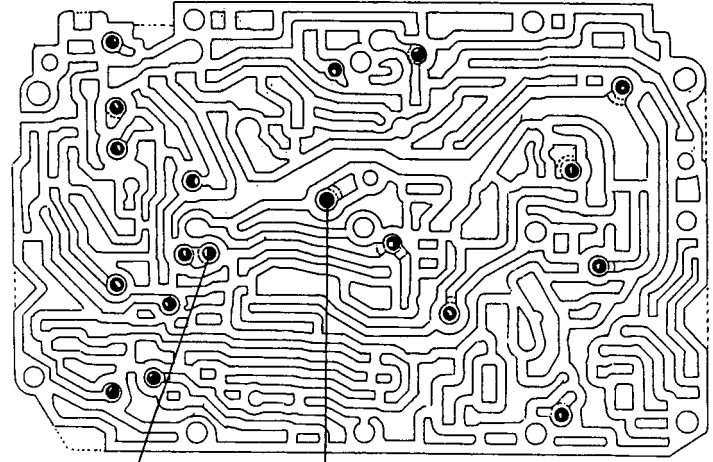


One .220 Rubber Ball Here
Place Spring Under This Ball (18) .215 Steel Check Ball Locations

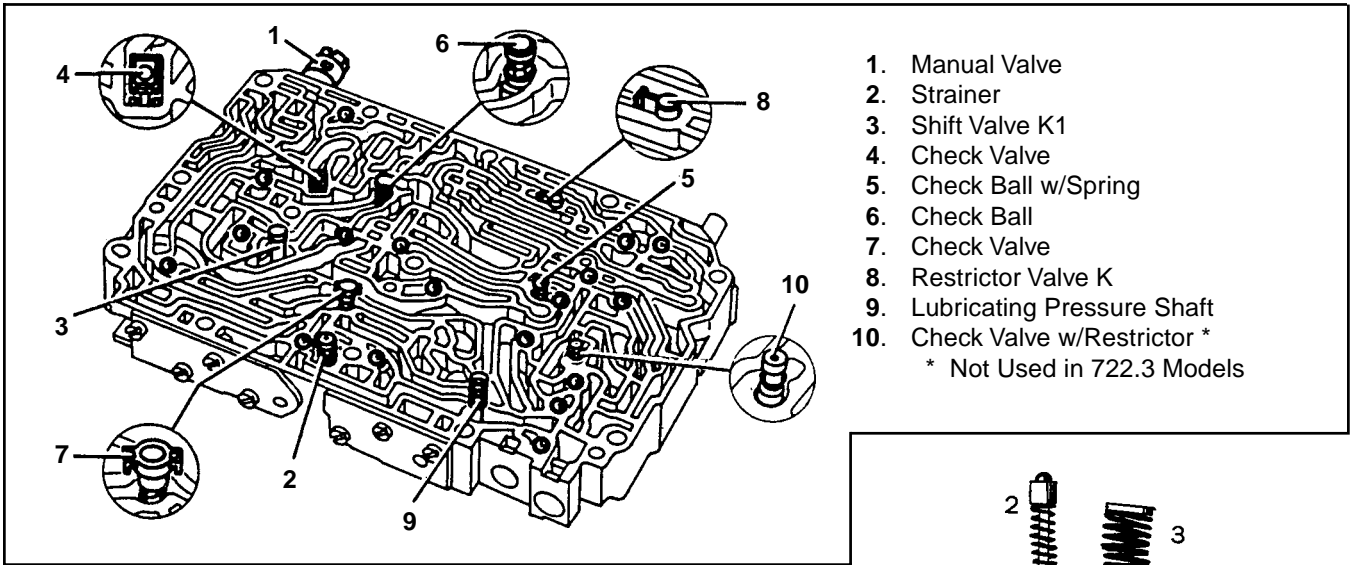


- 1. Manual Valve
 - 2. Strainer
 - 3. Shift Valve K1
 - 4. Check Valve
 - 5. Check Ball w/Spring
 - 6. Check Ball
 - 7. Check Valve
 - 8. Restrictor Valve K
 - 9. Lubricating Pressure Shaft
 - 10. Check Valve w/Restrictor *
- * Not Used in 722.3 Models

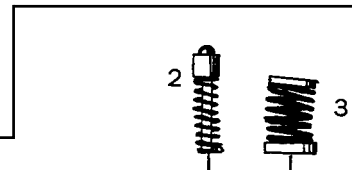


- 1. Pressure Limiting Valve
- 2. Modulating Pressure Relief Valve
- 3. Lubricating Pressure Valve

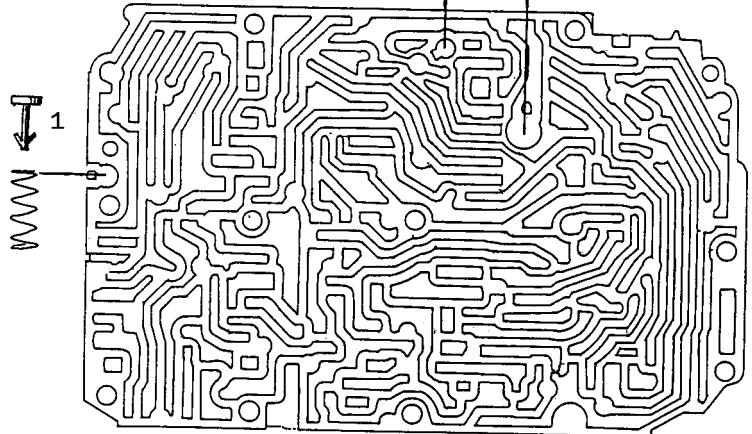


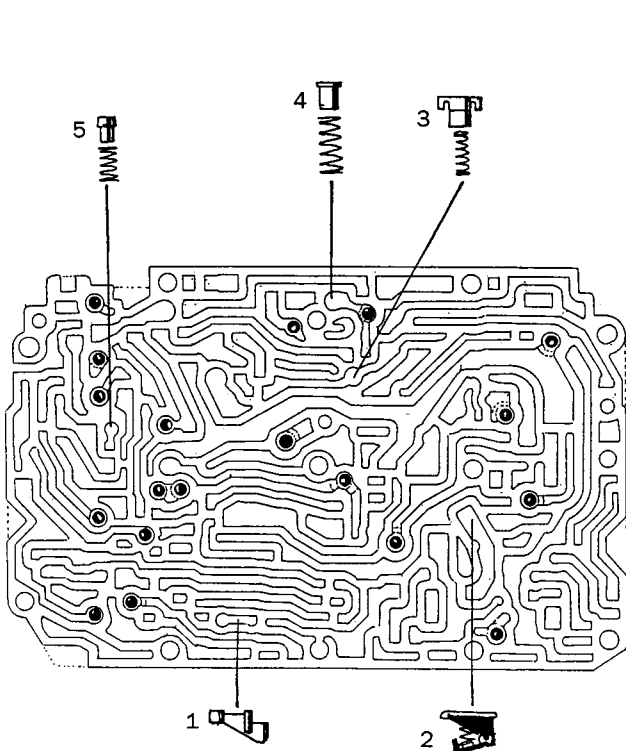



- 1. Throttle Check Valve
- 2. Plate Type Check Valve
- 3. Check Valve with Strainer
- 4. Throttle Check Valve with Strainer - Orifice .032
- 5. Throttle Check Valve - Orifice .032

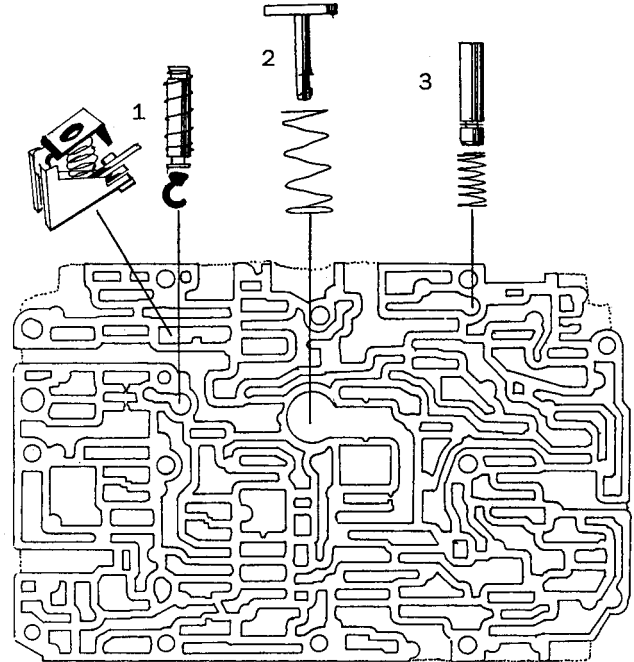

- 1. K1 Shut Off Valve
- 2. Primary Pump Check Valve
- 3. Lubricating Pressure Shift Pin

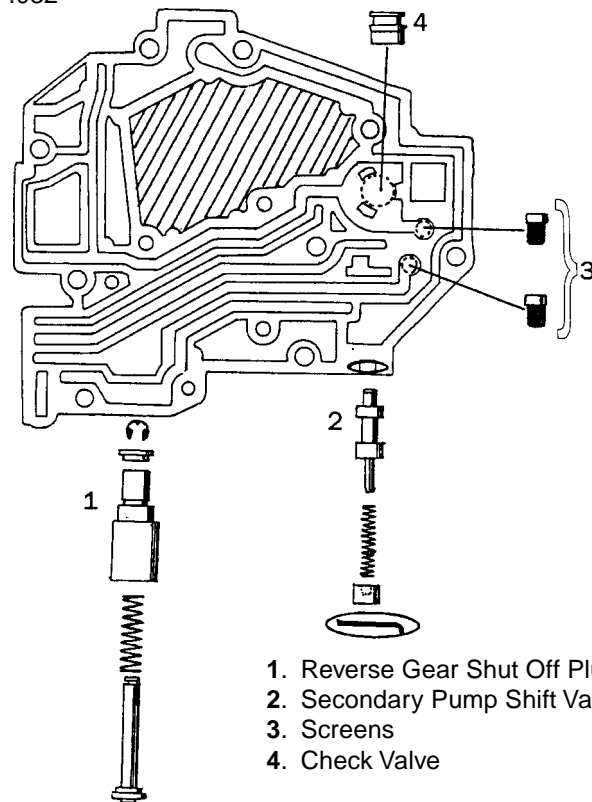



- 1. Reverse Gear Shut Off Plunger
- 2. Secondary Pump Shift Valve
- 3. Screens
- 4. Check Valve

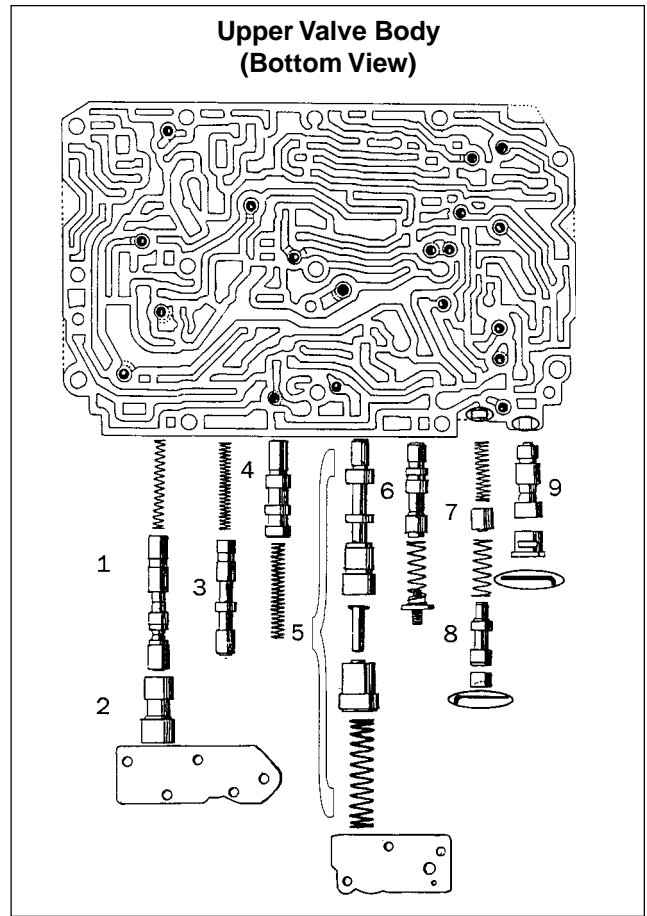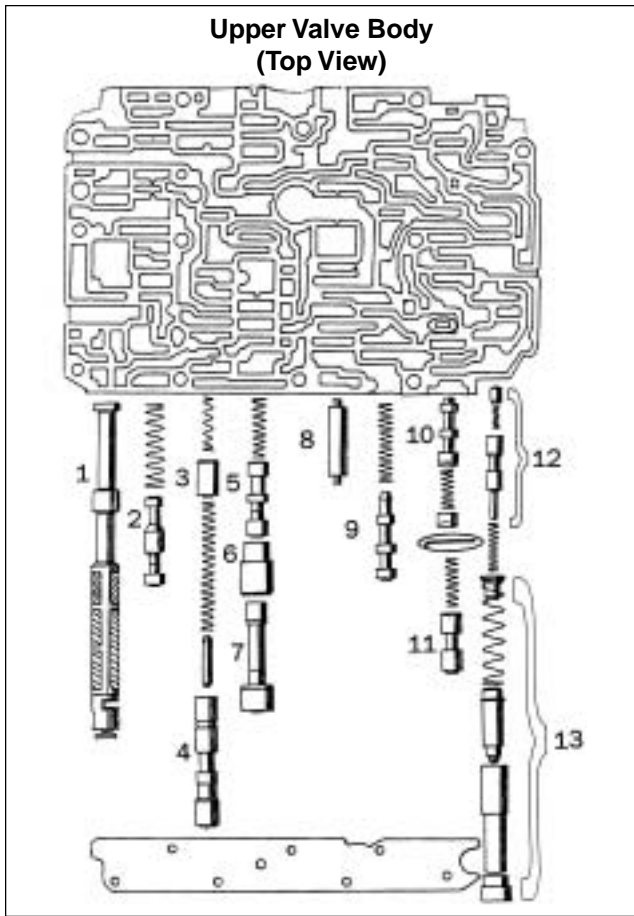

- 1. Manual Valve
- 2. Converter Adaption Control Valve
- 3. 3-4 Plunger Command Valve
- 4. 3-4 Command Valve
- 5. 1-2 Command Valve
- 6. 1-2 Command Valve Sleeve
- 7. 1-2 Plunger Command Valve
- 8. Shift Valve Bridging Clutch Plug
- 9. B2 Shift Valve
- 10. Kickdown Shift Valve
- 11. Governor Pressure Shift Valve
- 12. Pressure Control Valve
- 13. Pressure Control Valve Plunger

- 1. 2-3 Command Valve
- 2. 2-3 Command Valve Plunger
- 3. B1 Shift Valve
- 4. Basic Pressure Control Valve
- 5. Working Pressure Control Valve
- 6. Full Throttle Control Valve
- 7. B1 Plunger Control Valve
- 8. B1 Control Valve
- 9. Governor Pressure Boost Valve


The 722.3 has two plates early & late. The early plate will not fit the late valve body, however, the late model plate will fit the early model valve body.

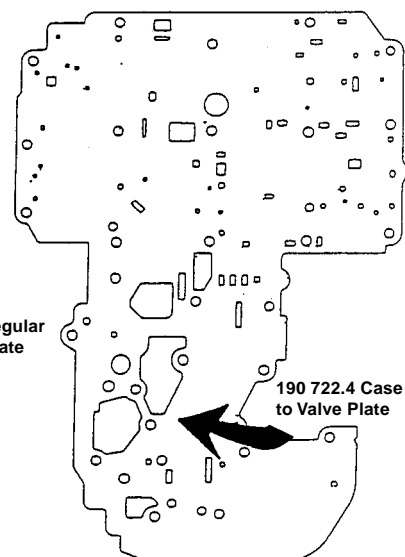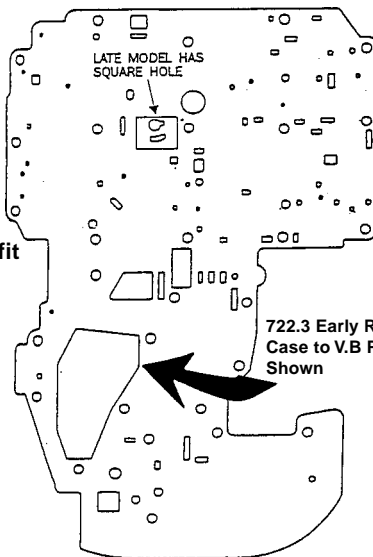


722.3 Early Regular Case to V.B Plate Shown

190 722.4 Case to Valve Plate

**Lower Valve Body
 (Front View)**

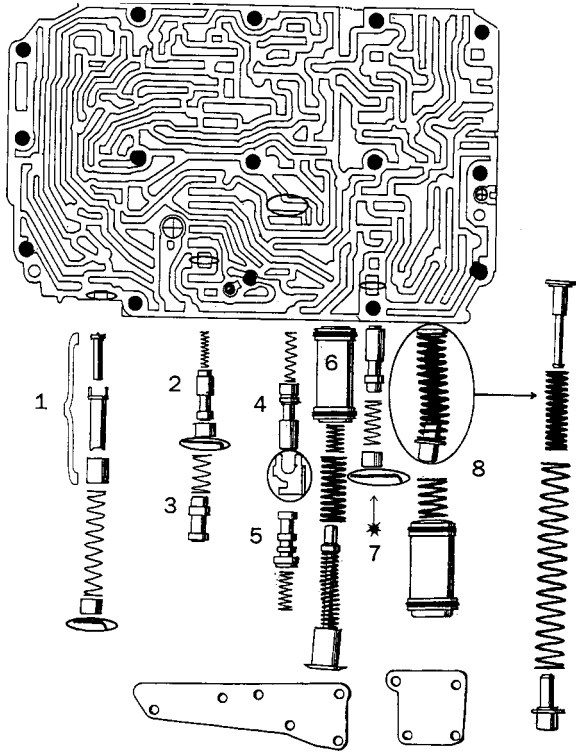

**Lower Valve Body
 (Back View)**

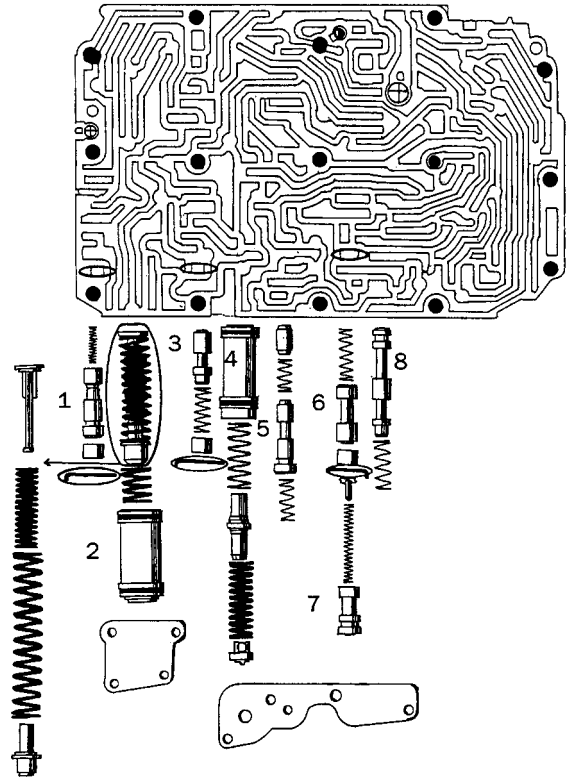

- 1. Accumulator Kick Down
- 2. RV1 Shut Off Valve
- 3. Brake Circuit Shut Off Valve
- 4. B1 Accumulator Control Valve

- 5. Deceleration Control Valve
- 6. B1 Accumulator
- 7. K1 Accumulator Control Valve
- 8. K1 Accumulator

- 1. Shift Control Pressure Valve
- 2. K2 Accumulator
- 3. K2 Accumulator Control Valve
- 4. Accumulator Switching On
- 5. RV2 Shut Off Valve

- 6. Accumulator Switching On Control Valve
- 7. K2 Shift Valve
- 8. B2 Detent Valve


CORRECT LOCATION

INCORRECT LOCATION



RESTRICTOR


A complaint of harsh reverse after overhaul may be due to the reverse feed restrictor into the wrong passage. Install the tapered end in first.

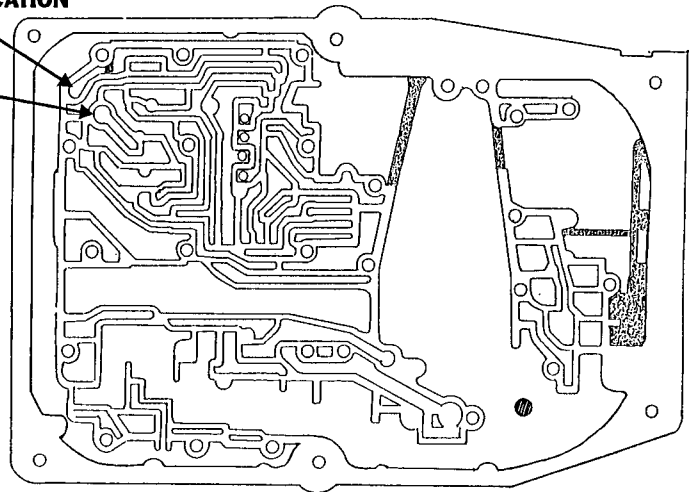

Lower Valve Body Update

There are three versions of the K2 shift valve body. We have illustrated these in the illustration below. Line-up "A" is the second and most common version. The "C" is the first version. The "B" line-up was first found in the 722.4 and became the third in the late model 722.3.

"E" shift control pressure valves can be found to be installed valve first (early) or spring than valve (late). Be sure to check valve type and line-up.

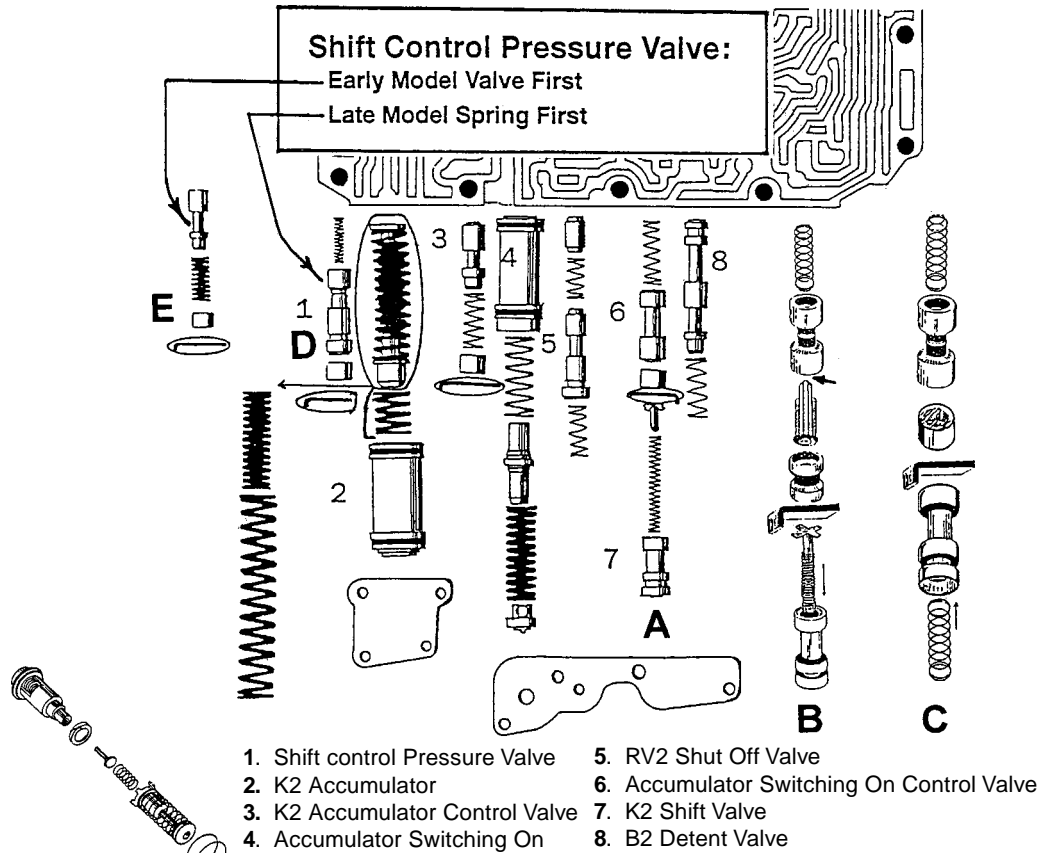

If water should mix with the transmission fluid. Then this complete valve line-up must be replaced. This line-up is comprised of all plastic parts.

NOTE:

This condition causes a complaint of no passing gear (kick-down) poor transmission performance and no kick-down to first gear. REMEMBER this transmission has normal second gear starts.

Mercedes 722.3 1986-Up TV Plunger Assembly

The TV valve line-up is different in the Mercedes models 420 SEL, 560 SEL and SL models. This change was made in the 1986 model year. Figure 1 illustrates the valve line-up.

Drawing by Wayne Colonna ATSG Copyright 1993